

HC-K 4/2-ESTS - Contact insert

1686889

<https://www.phoenixcontact.com/us/products/1686889>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 4+2+PE, size: B16, power contacts: 4, control contacts: 2, Pin, Screw connection, 830 V, 80 A, 1.5 mm² ... 16 mm², application: Power/signal

Your advantages

- Shock and vibration-resistant in accordance with DIN EN 61373

Commercial data

Item number	1686889
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF61
Product key	AF7ABA
GTIN	4017918924119
Weight per piece (including packing)	122.2 g
Weight per piece (excluding packing)	122.2 g
Customs tariff number	85366990
Country of origin	CN

HC-K 4/2-ESTS - Contact insert

1686889

<https://www.phoenixcontact.com/us/products/1686889>



Technical data

Notes

General	For housing HC-B16
General	Connectors may be operated only when there is no load/voltage.

Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
	Use wire end protection (screw connections do not have wire protection)


Product properties

Product type	Contact insert with a fixed no. of positions
Series	HC-K
Application	Power/signal
Type	B16
	B32
Number of positions	6
Connection profile	4+2+PE
Contact numbering	1 - 4 (power contacts)
	1 - 2 (control contacts)
No. of power contacts	4
No. of control contacts	2
Contact material type	turned
Screwdriver blade	0.8 x 4.5 mm (power contacts)

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	34 mm
Height	42 mm
Length	84.5 mm
Drill hole distance, horizontal	77.5 mm

Connection data

Connection technology

HC-K 4/2-ESTS - Contact insert

1686889

<https://www.phoenixcontact.com/us/products/1686889>



Connection technology	Screw connection (power contacts)
	Screw connection (control contacts)
Conductor connection	
Conductor cross-section	1.5 mm ² ... 16 mm ² (power contacts)
	0.5 mm ² ... 2.5 mm ² (control contacts)
Connection cross section AWG	16 ... 6 (power contacts)
	20 ... 14 (control contacts)
Tightening torque	0.8 Nm ... 1.2 Nm (PE connection cross-section with cable lug expandable to 16 mm ²)
	0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)
	3 Nm (Power contacts for cross sections of 2.5 mm ² ... 16 mm ² ; (2 Nm for cross section 2.5 mm ²))
	0.5 Nm (control contacts)
	1.2 Nm (Power contacts for cross section 1.5 mm ²)
Stripping length of the individual wire	14 mm (Power)
	7.5 mm (Signal)

Electrical properties

Rated voltage (III/3)	830 V (power contacts)
	400 V (control contacts)
Rated surge voltage	8 kV (power contacts)
	6 kV (control contacts)
Rated current	80 A (power contacts)
	16 A (control contacts)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Cu alloy
Contact carrier material	PC
Material of contact surface, power contact	Ag
Material of contact surface, control contact	Ag

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Standards and regulations

Standards/regulations	PC: Fire protection in rail vehicles - requirement set R22 acc. to DIN EN 45545-2 (Risk level HL1 - HL2)
-----------------------	--

HC-K 4/2-ESTS - Contact insert

1686889

<https://www.phoenixcontact.com/us/products/1686889>



PC: Fire protection in rail vehicles - requirement set R23 acc. to
DIN EN 45545-2 (Risk level HL1 - HL3)

HC-K 4/2-ESTS - Contact insert


1686889

<https://www.phoenixcontact.com/us/products/1686889>




Drawings

Dimensional drawing

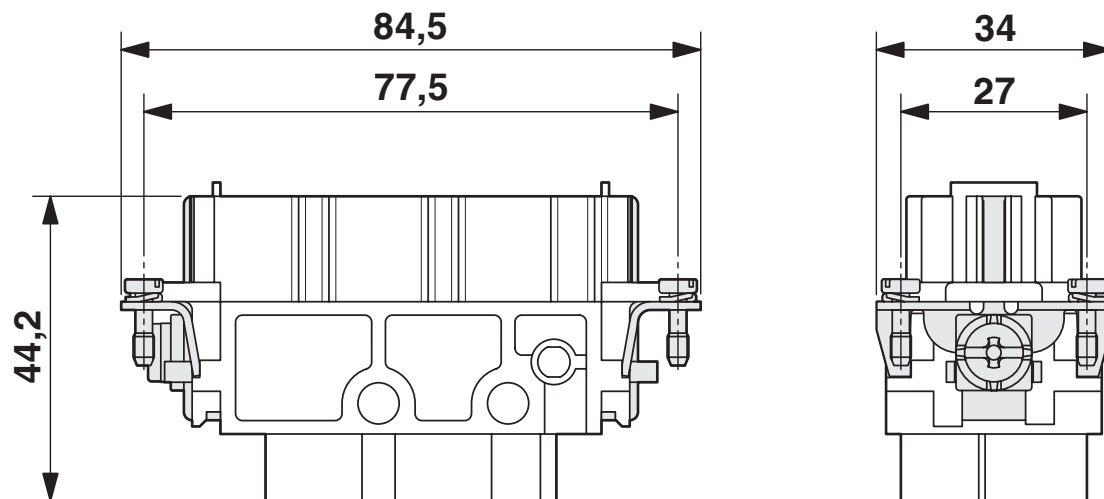

Male insert

Dimensional drawing

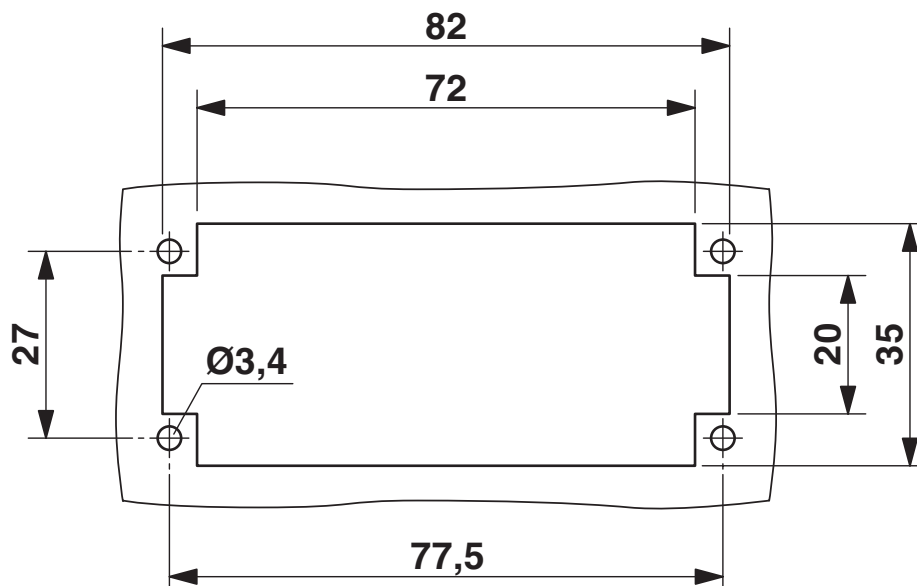


Mounting cutout when used without housing

HC-K 4/2-ESTS - Contact insert

1686889

<https://www.phoenixcontact.com/us/products/1686889>

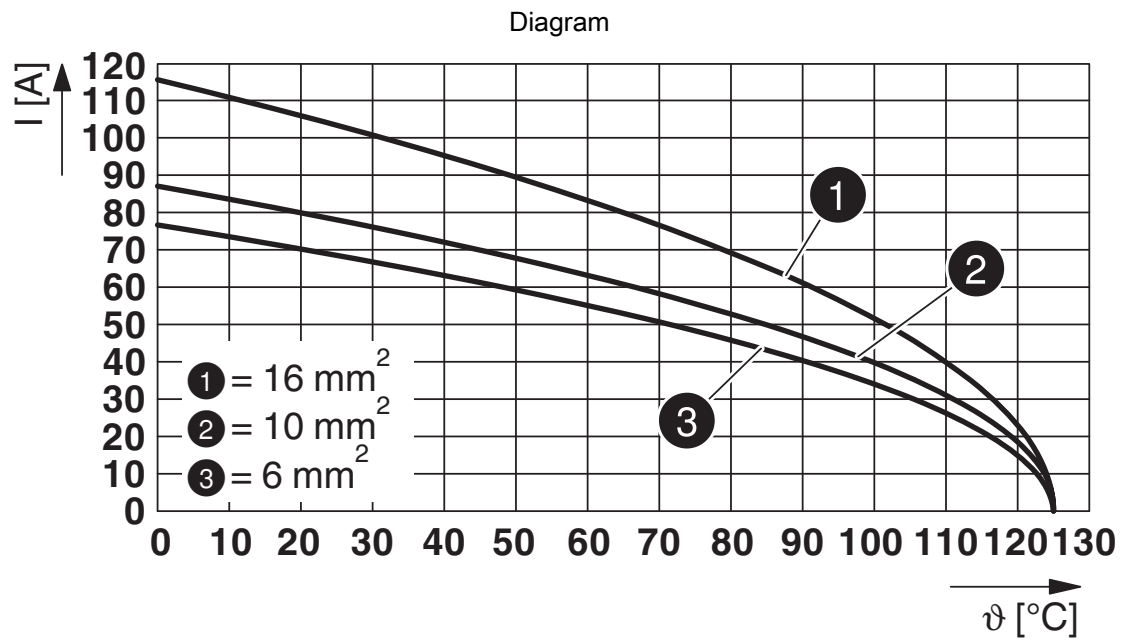

Derating diagram

HC-K 4/2-ESTS - Contact insert

1686889

<https://www.phoenixcontact.com/us/products/1686889>



Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1686889>

 UL Recognized Approval ID: E118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
Power	600 V	80 A	- 6	-
Control	600 V	16 A	14	-

HC-K 4/2-ESTS - Contact insert

1686889

<https://www.phoenixcontact.com/us/products/1686889>



Classifications

ECLASS

ECLASS-13.0	27440205
ECLASS-15.0	27440205

ETIM

ETIM 10.0	EC000438
-----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

HC-K 4/2-ESTS - Contact insert

1686889

<https://www.phoenixcontact.com/us/products/1686889>



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	1cdb4eed-7837-4c3b-9923-9ac67f935628

EF3.1 Climate Change

CO2e kg	15.147 kg CO2e
---------	----------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com