# AH-ME - Covering hood

3240265

https://www.phoenixcontact.com/us/products/3240265

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cover, for the contact- and dust-protected encapsulation of the components

## Your advantages

- The cover can be securely snapped onto the corresponding APH-ME end brackets and sealed as an option
- Cover profiles provide protection against unauthorized actuation of terminal strips
- This profile has been specially adapted to the shape of the test disconnect terminal blocks
- The AH-ME cover, which is enclosed on all sides, is snapped onto the end brackets and can be sealed as an option

## Commercial data


| | |
|---|---|
| Item number | 3240265 |
| Packing unit | 5 pc |
| Minimum order quantity | 5 pc |
| Sales key | BE06 |
| Product key | BE61ZX |
| GTIN | 4046356462884 |
| Weight per piece (including packing) | 257.25 g |
| Weight per piece (excluding packing) | 191.16 g |
| Customs tariff number | 39269097 |
| Country of origin | DE |

## Technical data

### Product properties

| | |
|---|---|
| Product type | Cover profile |

### Dimensions

| | |
|---|---|
| Dimensional drawing |  |
| Width | 150 mm |
| Height | 200 mm |
| Depth | 78 mm |

### Material specifications

| | |
|---|---|
| Color | transparent |
| Material | PC |
| Flammability rating according to UL 94 | V2 |
| Relative insulation material temperature index (Elec., UL 746 B) | 125 °C |


### Environmental and real-life conditions

#### Ambient conditions

| | |
|---|---|
| Ambient temperature (operation) | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

## Drawings

Dimensional drawing

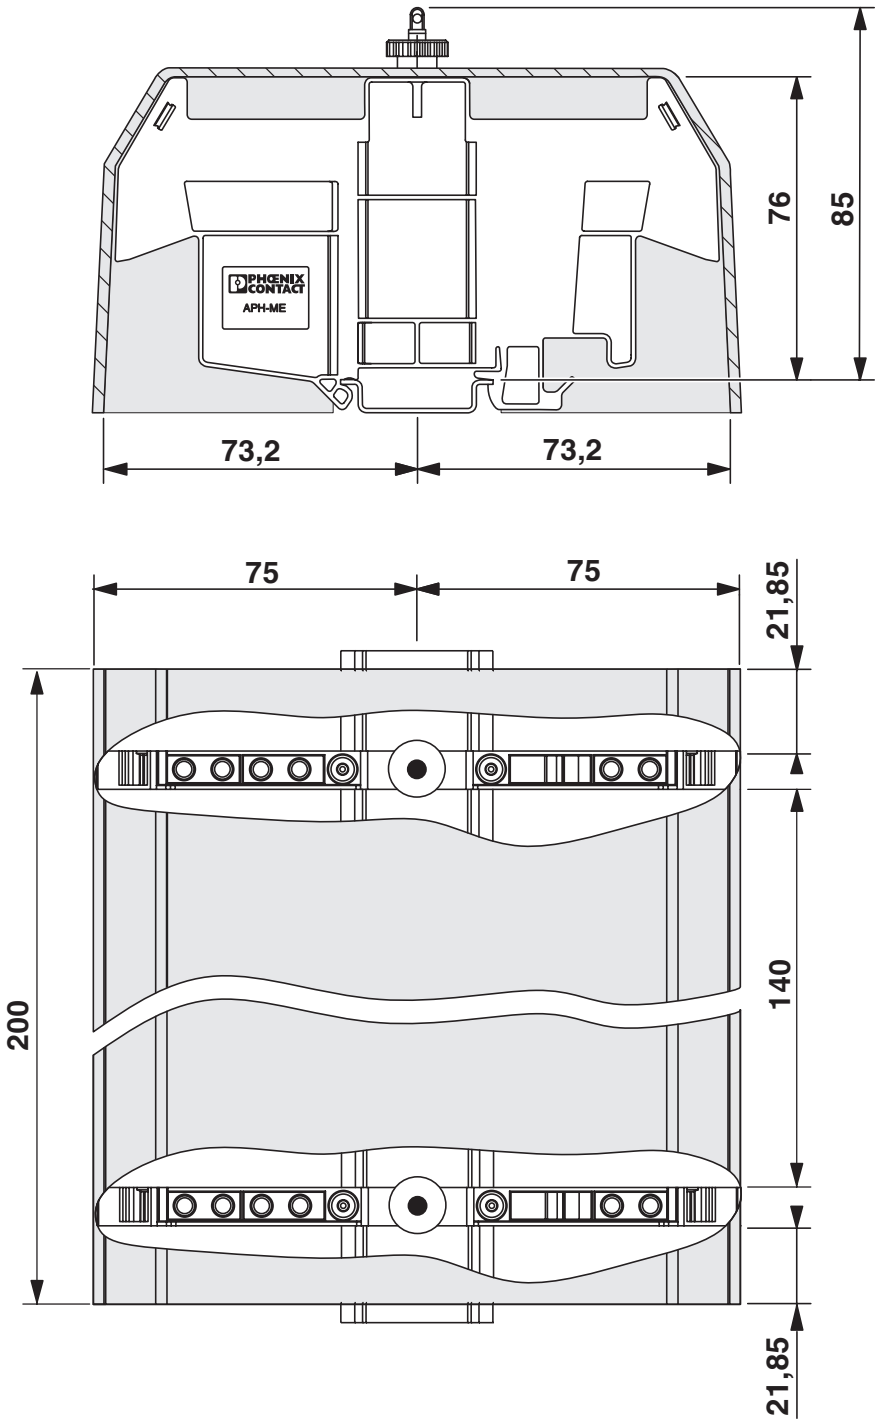

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27141190 |
| ECLASS-15.0 | 27141190 |

### ETIM

| | |
|---|---|
| ETIM 10.0 | EC002848 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 39121400 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

EF3.1 Climate Change

| | |
|---|---|
| CO2e kg | 0.762 kg CO2e |


Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com



Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com