

QUINT-PS-3X400-500AC/24DC/10 - Power supply



2938617

<https://www.phoenixcontact.com/us/products/2938617>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail power supply unit 24 V DC/10 A, primary-switched, 3-phase.
Please use the following item in new systems: 2904621

Product description

QUINT POWER power supply units for plant and special engineering reliably start heavy loads with high inrush currents using the POWER BOOST. Thanks to the wide-range input and extensive package of approvals, they can be used in all sectors of industry the world over. The switching output or floating relay contact are used for remote diagnostics.

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2938617 |
| Packing unit | 1 pc |
| Sales key | CM11 |
| Product key | CMPP33 |
| GTIN | 4017918908379 |
| Weight per piece (including packing) | 1,535.622 g |
| Weight per piece (excluding packing) | 1,100 g |
| Customs tariff number | 85044095 |
| Country of origin | TH |

Technical data

Input data

AC operation

| | |
|--|--|
| Nominal input voltage range | 3x 400 V AC ... 500 V AC |
| Input voltage range | 3x 320 V AC ... 575 V AC (for all three phases) 450 V DC ... 800 V DC |
| Input voltage range AC | 3x 320 V AC ... 575 V AC (for all three phases) |
| Input voltage range DC | 450 V DC ... 800 V DC |
| Voltage type of supply voltage | AC/DC |
| Inrush current | < 15 A (typical) |
| Inrush current integral (I^2t) | 4 A ² s |
| AC frequency range | 45 Hz ... 65 Hz |
| Frequency range DC | 0 Hz |
| Mains buffering time | > 40 ms (400 V AC) > 40 ms (480 V AC) |
| Current consumption | approx. 3x 0.63 A (400 V AC) 3x 0.57 A (480 V AC) |
| Nominal power consumption | 280 W |
| Protective circuit | Transient surge protection; Varistor |
| Typical response time | < 1 s |
| Input fuse | 5 A (slow-blow, internal) |
| Permissible DC backup fuse | DC: Connect a suitable fuse upstream |
| Recommended breaker for input protection | 3x 6 A ... 16 A (Characteristics B, C, D, K) |
| Discharge current to PE | < 3.5 mA |

Output data

| | |
|---|---|
| Efficiency | > 90 % |
| Nominal output voltage | 24 V DC \pm 1 % |
| Setting range of the output voltage (U_{Set}) | 22.5 V ... 28.5 V |
| Nominal output current (I_N) | 10 A (up to 60 °C) |
| POWER BOOST (I_{Boost}) | 15 A |
| Derating | 60 °C ... 70 °C (2.5 %/K) |
| Feedback voltage resistance | 35 V DC |
| Active current limitation | ca. $I_{BOOST} = 15$ A (for short-circuit) |
| Control deviation | < 1 % (change in load, static 10 % ... 90 %) < 2 % (change in load, dynamic 10 % ... 90 %) < 0.1 % (change in input voltage \pm 10 %) |
| Residual ripple | < 20 mV _{PP} (with nominal values) |
| Output power | 240 W |
| Peak switching voltages nominal load | < 100 mV _{PP} (20 MHz) |
| Maximum no-load power dissipation | < 4 W |
| Power loss nominal load max. | < 28 W |

QUINT-PS-3X400-500AC/24DC/10 - Power supply



2938617

<https://www.phoenixcontact.com/us/products/2938617>

| | |
|------------------------|--|
| Rise time | < 2 ms (U_{OUT} (10 % ... 90 %)) |
| Connection in parallel | yes, for redundancy and increased capacity |
| Connection in series | yes |

Signal: DC OK active

| | |
|---------------------------|--|
| Output description | $U_{OUT} > 0.9 \times U_N$: High signal |
| Maximum switching voltage | ≤ 24 V |
| Output voltage | + 24 V DC (Signal) |
| Maximum inrush current | ≤ 40 mA |
| Continuous load current | ≤ 40 mA |

Signal: DC OK floating

| | |
|---------------------------|--|
| Output description | Relay contact, $U_{OUT} > 0.9 \times U_N$: Contact closed |
| Maximum switching voltage | ≤ 30 V AC/DC |
| Maximum inrush current | ≤ 1 A |
| Continuous load current | ≤ 1 A |

Connection data

Input

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross-section, rigid min. | 0.2 mm ² |
| Conductor cross-section, rigid max. | 2.5 mm ² |
| Conductor cross-section flexible min. | 0.2 mm ² |
| Conductor cross-section flexible max. | 2.5 mm ² |
| Conductor cross-section AWG min. | 24 |
| Conductor cross-section AWG max. | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Output

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross-section, rigid min. | 0.2 mm ² |
| Conductor cross-section, rigid max. | 2.5 mm ² |
| Conductor cross-section flexible min. | 0.2 mm ² |
| Conductor cross-section flexible max. | 2.5 mm ² |
| Conductor cross-section AWG min. | 24 |
| Conductor cross-section AWG max. | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Signal

QUINT-PS-3X400-500AC/24DC/10 - Power supply



2938617

<https://www.phoenixcontact.com/us/products/2938617>

| | |
|---------------------------------------|---------------------|
| Conductor cross-section, rigid min. | 0.2 mm ² |
| Conductor cross-section, rigid max. | 2.5 mm ² |
| Conductor cross-section flexible min. | 0.2 mm ² |
| Conductor cross-section flexible max. | 2.5 mm ² |
| Conductor cross-section AWG min. | 24 |
| Conductor cross-section AWG max. | 12 |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Signaling

| | |
|---------------------------|-------------------------|
| Types of signaling | LED |
| | Active switching output |
| | Relay contact |
| Operating voltage display | Green LED |

Signal output: DC OK active

| | |
|------------------------|---|
| Status display | "DC OK" LED green |
| Note on status display | $U_{OUT} < 0.9 \times U_N$: LED flashing |

Signal output: DC OK floating

| | |
|----------------|-------------------|
| Status display | "DC OK" LED green |
|----------------|-------------------|

Electrical properties

| | |
|---------------------------------|-------------------------|
| Number of phases | 3 |
| Insulation voltage input/output | 4 kV AC (type test) |
| | 2 kV AC (routine test) |
| Insulation voltage output / PE | 500 V DC (routine test) |
| Insulation voltage input / PE | 3.5 kV AC (type test) |
| | 2 kV AC (routine test) |

Product properties

| | |
|----------------------------|--------------|
| Product type | Power supply |
| Product family | QUINT POWER |
| MTBF (IEC 61709, SN 29500) | > 500000 h |

Insulation characteristics

| | |
|---------------------|------------------------|
| Protection class | I (with PE connection) |
| Degree of pollution | 2 |

Dimensions

| | |
|--------|--------|
| Width | 85 mm |
| Height | 130 mm |
| Depth | 125 mm |

Installation dimensions

QUINT-PS-3X400-500AC/24DC/10 - Power supply



2938617

<https://www.phoenixcontact.com/us/products/2938617>

| | |
|----------------------------------|---------------|
| Installation distance right/left | 0 mm / 0 mm |
| Installation distance top/bottom | 50 mm / 50 mm |

Alternative assembly

| | |
|--------|--------|
| Width | 122 mm |
| Height | 130 mm |
| Depth | 88 mm |

Mounting

| | |
|-------------------|--|
| Assembly note | alignable: horizontally 0 mm, vertically 50 mm |
| Mounting position | horizontal DIN rail NS 35, EN 60715 |

Material specifications

| | |
|------------------|----------------|
| Housing material | Metal |
| Type of housing | AluNox (AlMg1) |

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Max. permissible relative humidity (operation) | 95 % (at 25 °C, non-condensing) |
| Shock | 18 ms, 30g, in each space direction (according to IEC 60068-2-27) |
| Vibration (operation) | < 15 Hz, amplitude ± 2.5 mm (according to IEC 60068-2-6) 15 Hz ... 150 Hz, 2.3g, 90 min. |

Standards and regulations

| | |
|--|--------------------------------------|
| Standard – Limitation of mains harmonic currents | EN 61000-3-2 |
| Standard - Electrical safety | EN 62368-1 |
| Standard - Equipment safety | GS (tested safety) |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment | EN 62368-1 |
| Standard – Safety extra-low voltage | EN 62368-1 (SELV) EN 60204 (PELV) |
| Standard - Safe isolation | DIN VDE 0100-410 |

Approvals

| | |
|-----------------------|--|
| Shipbuilding approval | DNV GL (EMC A) |
| UL approvals | UL/C-UL listed UL 508 UL/C-UL Recognized UL 60950-1 UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |

EMC data

| | |
|-------------------------------|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
|-------------------------------|---|

QUINT-PS-3X400-500AC/24DC/10 - Power supply



2938617

<https://www.phoenixcontact.com/us/products/2938617>

| | |
|-------------------------------------|---|
| Low Voltage Directive | Conformance with Low Voltage Directive 2014/35/EC |
| EMC requirements for noise emission | EN 61000-6-3 |
| | EN 61000-6-4 |
| EMC requirements for noise immunity | EN 61000-6-1 |
| | EN 61000-6-2 |

Noise emission

| | |
|-----------------------|---------------------|
| Standards/regulations | EN 55011 (EN 55022) |
|-----------------------|---------------------|

Electrostatic discharge

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
| Housing | Level 4 |

Electrostatic discharge

| | |
|-------------------|-------------|
| Contact discharge | 8 kV |
| Discharge in air | 15 kV |
| Comments | Criterion B |

Electromagnetic HF field

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

Electromagnetic HF field

| | |
|---------------------|------------------|
| Frequency range | 80 MHz ... 2 GHz |
| Test field strength | 10 V/m |
| Comments | Criterion A |

Fast transients (burst)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

Fast transients (burst)

| | |
|----------|-------------------------------|
| Input | 4 kV (level 4 - asymmetrical) |
| Output | 2 kV (Level 3 - asymmetrical) |
| Signal | 1 kV (Level 2 - asymmetrical) |
| Comments | Criterion B |

Surge voltage load (surge)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-5 |
|-----------------------|--------------|

Surge voltage load (surge)

| | |
|----------|---|
| Input | 4 kV (inst. class 4 - asymmetrical: conductor to ground) |
| | 2 kV (inst. class 4 -symmetrical: conductor to conductor) |
| Output | 0.5 kV (level 1 - asymmetrical: conductor to ground) |
| | 0.5 kV (level 1 - symmetrical: conductor to conductor) |
| Signal | 1 kV (level 2 - asymmetrical: conductor to ground) |
| Comments | Criterion B |

Conducted interference

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

QUINT-PS-3X400-500AC/24DC/10 - Power supply



2938617

<https://www.phoenixcontact.com/us/products/2938617>

Conducted interference

| | |
|---------------------|------------------------|
| Input/output/signal | Level 3 - asymmetrical |
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments | Criterion A |
| Voltage | 10 V |

Voltage dips

| | |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-11 |
|-----------------------|---------------|

Emitted interference


| | |
|--|--|
| Standards/regulations | EN 61000-6-3 |
| Radio interference voltage in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |
| Emitted radio interference in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |

2938617

<https://www.phoenixcontact.com/us/products/2938617>

Drawings

Block diagram

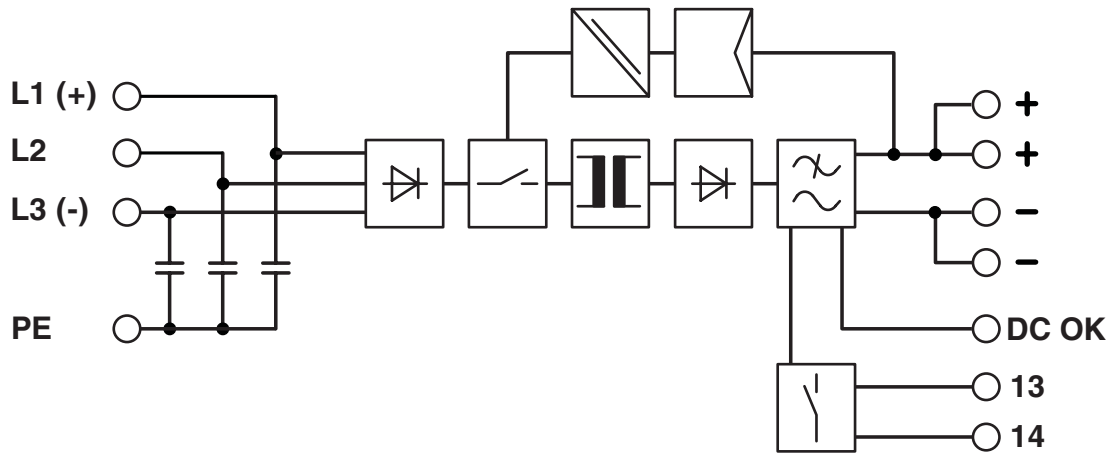

QUINT-PS-3X400-500AC/24DC/10 - Power supply



2938617

<https://www.phoenixcontact.com/us/products/2938617>

Classifications

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

QUINT-PS-3X400-500AC/24DC/10 - Power supply



2938617

<https://www.phoenixcontact.com/us/products/2938617>

Environmental product compliance

EU RoHS

| | |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-25 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|----------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
|-------------------------------------|----------------------|

EF3.1 Climate Change

| | |
|---------|----------------|
| CO2e kg | 45.811 kg CO2e |
|---------|----------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com